Christina

By: BurdaStyle

http://www.burdastyle.com/projects/christina

Oh, Winter! Your face is frozen, the sun is gone, and the holidays are long past. We know, BurdaStylers, and we're here to help with this warm muff!

Materials

wool or heavy cotton for the self, lighter cotton or silk for the lining, batting

Step 1 — Rectangular Muff

If you are going to quilt and/or gather the lining, make enough to cover the pattern pieces. Cut self, lining, and batting (see related technique).

Step 2 — Rectangular Muff

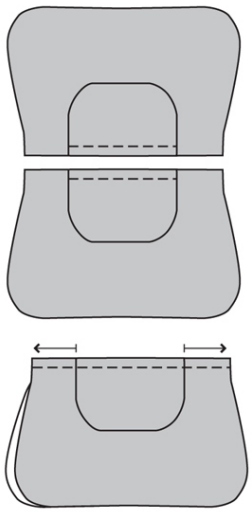

Sew piece 4 (pocket) to pieces 1 and 2 (front and back) between notches B. Then, sew Front and Back together from edge of pocket to side seam.

Step 3 — Rectangular Muff



Sew the sides of the pocket, leaving an opening in the bottom.

Step 4 — Rectangular Muff

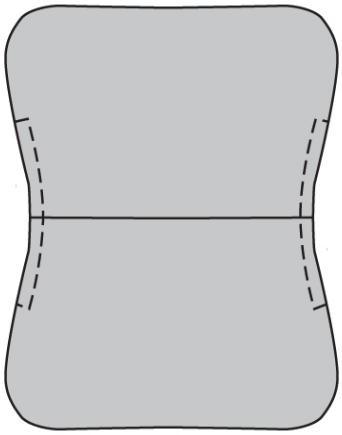

Baste batting to the self on the wrong side.

Right sides together, sew together the top of lining pieces 1 and 2 (the seam with notch marks B).

Right sides together, sew self and lining together between notches A. this is the opening for the hands.

Step 5 — Rectangular Muff

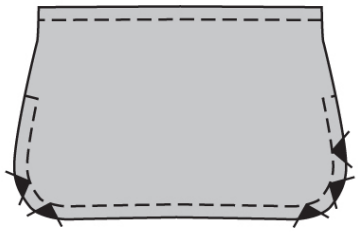

Now, put right sides together of lining only, and sew around the curve. Repeat with self. Snip into the curved corners to , but not through, the stitch line.
Now, turn the muff through the hole we left in the pocket. Close hole with hand or machine stitching.

Step 6 — Rectangular Muff

Make a strap as thick and long as you want, and feed through muff. We made ours by cutting a long rectangle 2â’x48â’, turning the raw edges together, pressing, turn the edges together again, press, and give a topstitch down the edge.

Step 7 — Cylinder Muff

If you are going to quilt and/or gather the lining, make enough to cover the pattern pieces. Cut self, lining, and batting (see related technique.

Step 8 — Cylinder Muff

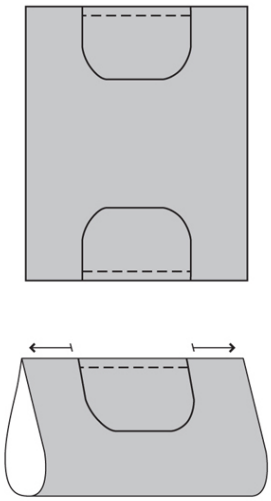

Sew piece 4 (pocket) to piece 3between notches B grailine edges. Then, sew together from edge of pocket to side seam.

Step 9 — Cylinder Muff

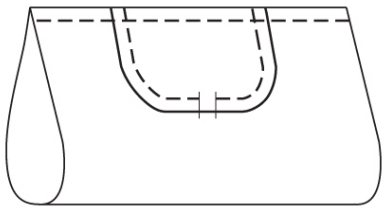

Sew the sides of the pocket, leaving an opening in the bottom.
Baste batting to the self on the wrong side.
Right sides together, sew together the tops of the lining pieces (the seam with notch marks B).

Step 10 — Cylinder Muff

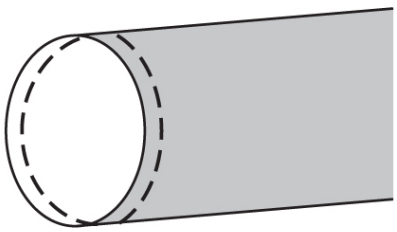

Put one cylinder inside the other, right sides together. Sew around one edge. Turn the cylinder so the self is on the outside. One side is still open. Pin the lining and the self together at the seam; this will help you make sure you are sewing them together correctly.
Now, go through the hole in the pocket, and pull the unfinished seam out. Using the pin to help you determine the right way to se the lining and self together, finish the seam, right sides together, all the way around. When finished, push the end back out through the hole in the pocket, and finish the hole, either with hand or machine stitching.

Step 11 — Cylinder Muff

Make a strap as thick and long as you want, and feed through muff. We made ours by cutting a long rectangle 2â’x48â’, turning the raw edges together, pressing, turn the edges together again, press, and give a topstitch down the edge.

BurdaStyle

Christina